
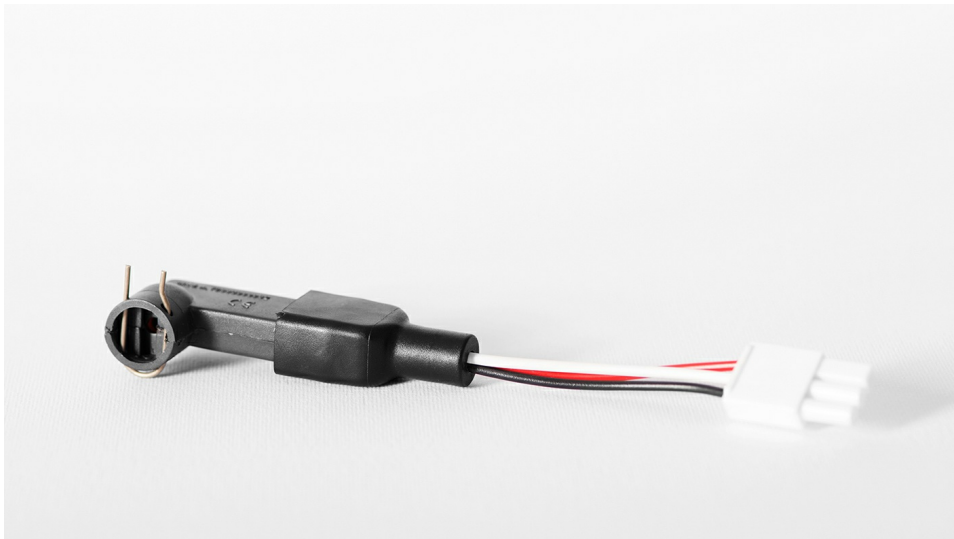


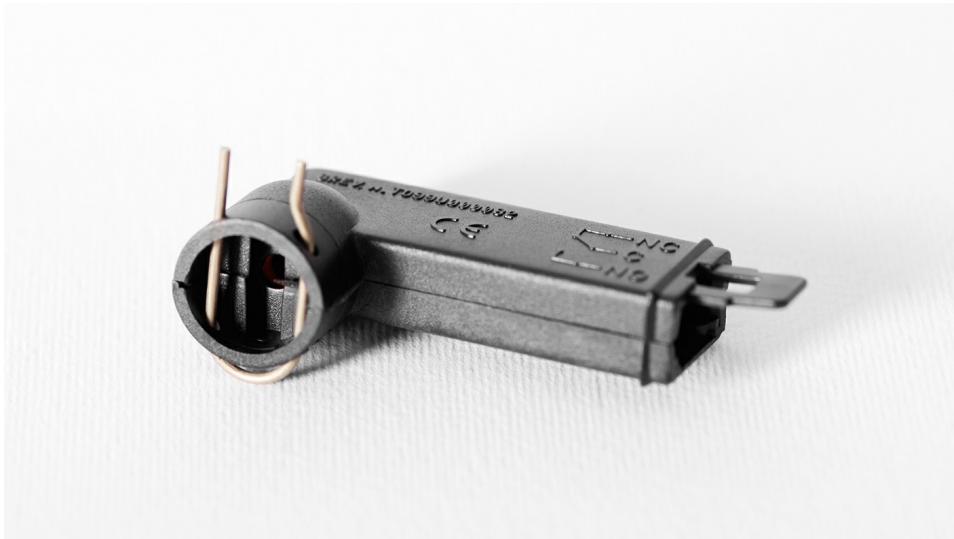

Microswitches for pressostats, available fixing by pressure or hooking fork, harness supplied on request

TECHNICAL DETAILS

Positions	3 (C-NC-NO)
Fastening	Pressure / Fork
Rated voltage	30 Vdc
Rated current	1 A
Temperature range	-10°C / +60°C
Type of terminals	Pin male pitch 2,5 mm
Connectable connector	Stocko MKH 5133-1-0-300

TEST (ABOUT INTERNAL MICROSWITCH, CARRY OUT BY THE PRODUCER)

Dielectric strenght between terminals	500 Vac / 2mA / 60 sec
Dielectric strenght between terminals and frame	500 Vac / 2mA / 60 sec
Insulation resistance between terminals	500 Vdc / 100 MΩ / 60 sec
Insulation resistance between terminals and frame	500 Vdc / 100 MΩ / 60 sec

ACCESSORIES

Fixing fork	Cod. 13102002
Protection cap	Cod. 13102003
Harness	To customize

MATERIAL MOULDING

External insulation

PA66 V0 RTI elec 140

EXAMPLE OF APPLICATIONS

Pressure switches / flow switches

Fugas 15AS5x series

CATEGORY

Micro switches

CERTIFICATION

