


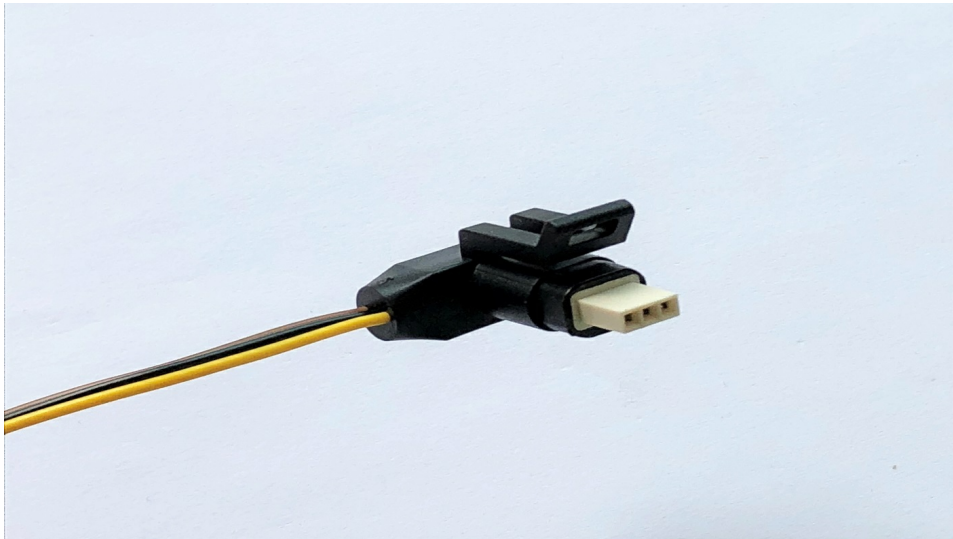

Connector for the speed control of pumps, PWM, Grundfos UPM3 series, angled version with single wires. Used on pumps compliant to the ErP directive.

TECHNICAL DETAILS

Normative references	EN 61984
Housing type	Free connector, male, non rewirable
Positions	2 / 3
Pitch	2,54 mm
Fastening	Locking device
Rated voltage	< 50 Vdc
Rated current	< 0,2 A
Pollution degree	2 (EN 60664-1)
Degree of protection IP	—
Temperature range	-30°C / +105°C
Type of terminals	Female — crimped
Connectable conductors	Flexible wires
Insulation class	II

TEST

Glow wiretest	650°C (EN 60335-1)
---------------	--------------------

WIRES

Section	0,35 mm2 (AWG22)
---------	------------------

MATERIAL MOULDING

External insulation	Polypropylene
Internal connector	PA66 V0 RTI elec 140

CATEGORY

Connectors for pumps and circulators

CERTIFICATION

