



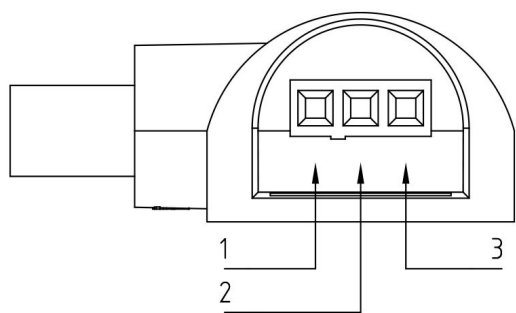

PR72

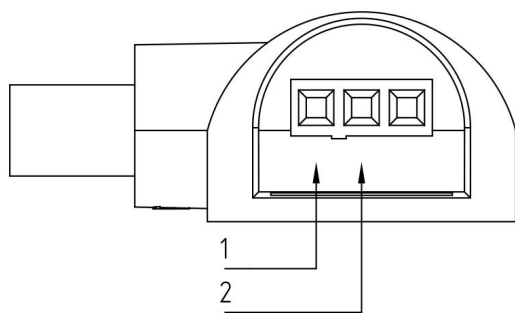

PR73

Connector for the speed control of pumps, PWM, angled version. Used on pumps compliant to the ErP directive.

TECHNICAL DETAILS

Normative references	EN 61984
Housing type	Free connector, male, non rewirable
Positions	2 / 3
Pitch	2,54 mm
Fastening	Locking device on the pump
Rated voltage	< 50 Vdc
Rated current	< 0,2 A
Pollution degree	2 (EN 60664-1)
Degree of protection IP	N.A. (to test with the opposite part)
Temperature range	LLT -20°C / ULT 105°C
Type of terminals	Female — crimped
Connectable conductors	Flexible cables
Insulation class	II

TEST

Glow wire test	650°C (EN 60335-1)
----------------	--------------------

CABLES

Type	LIYY-W
Section	0,35 mm2 (AWG22)

MATERIAL MOULDING

External insulation	PVC TM3 / UL 758 105°C—96 Sh A
Internal connector	PA66 V0 RTI elec 140

CATEGORY

Connectors for pumps and circulators

CERTIFICATION

