


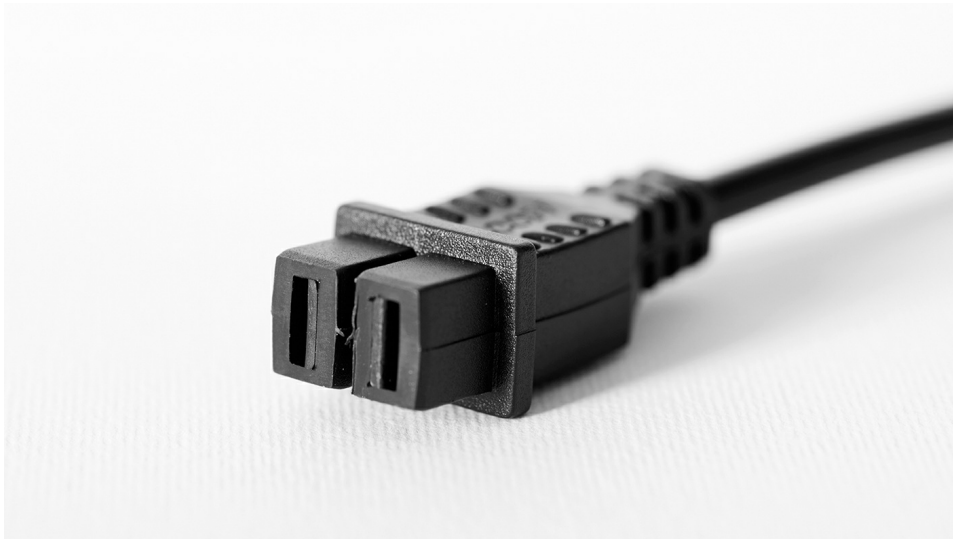

Connector for ow switches.
Able to be used for other applications with compatible pitch and terminals.

TECHNICAL DETAILS

Normative references	EN 61984
Housing type	Mobile, maschio, non smontabile
Positions	2
Pitch	10 mm
Fastening	N.A.
Rated voltage	230 Vac
Rated current, section 0,50 mm2	3 A
Pollution degree	2 (EN 60664-1)
Degree of protection IP	N.A. (to test with the opposite part)
Temperature range	-30°C / +90°C
Type of terminals	Female 6,3x0,8—crimped
Connectable conductors	Flexible cables
Insulation class	II

TEST

Dielectric strenght between live parts and accessible external surface	1500 Vac / 2mA / 60 sec (EN 60512-4-1)
Insula on resistance between live parts and accessible external surface	500 Vdc / 20 MΩ / 60 sec (EN 60512-3-1)
Glow wire test	650°C (EN 60335-1)

CABLES

Type	H03V2V2-F / LIYY-W
Section	2x0,50 mm2 / 2x0,35 mm2

MATERIAL MOULDING

External insulation

PVC TM3 / UL 758 105°C

CATEGORY

Connectors for pressure switches, flow switches and micro switches, Connettors for thermostats and sensors

CERTIFICATION

