
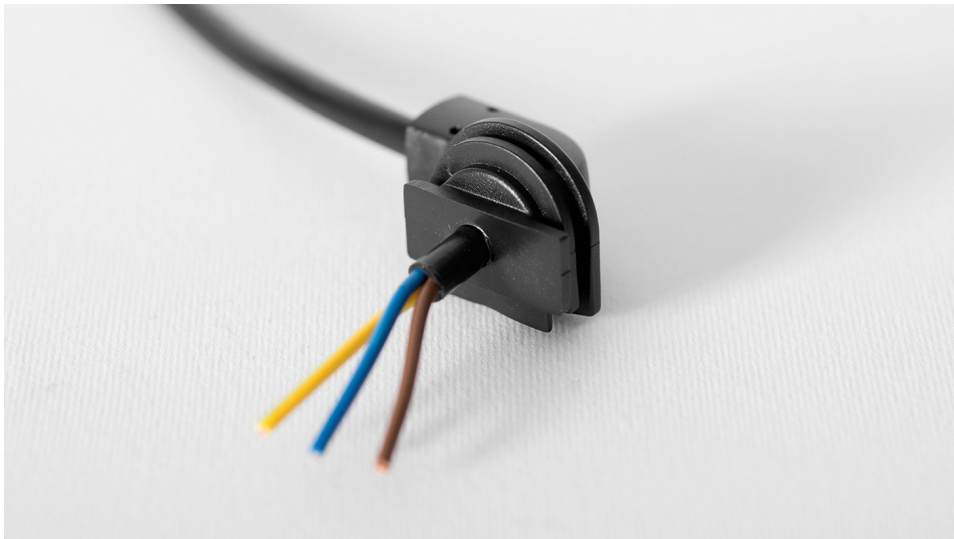
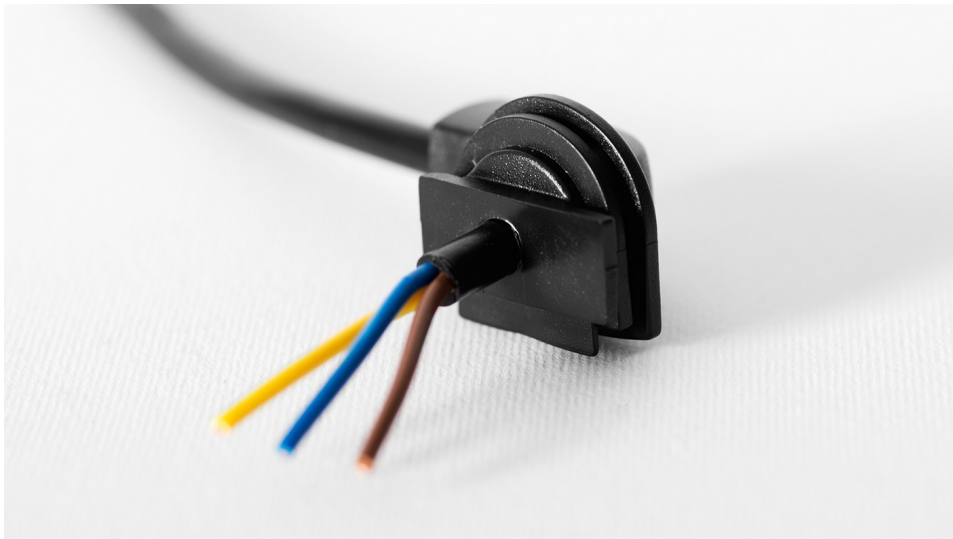
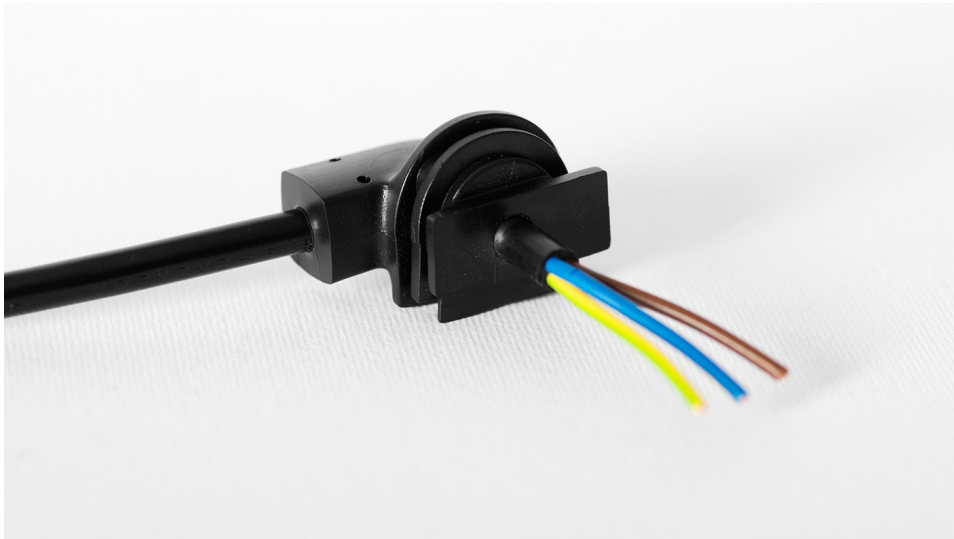


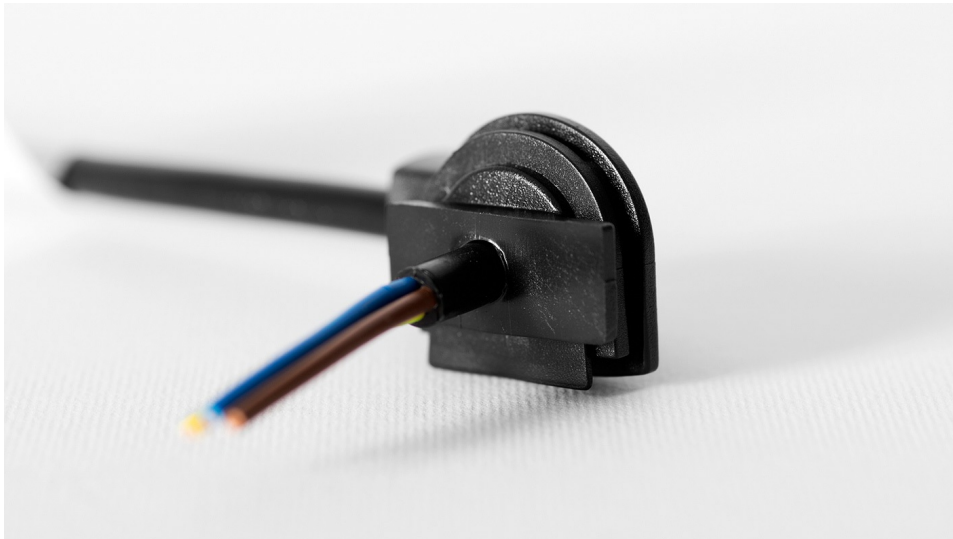

Cable gland for the power supply of pumps Grundfos.

TECHNICAL DETAILS

Fastening	By pressure
Rated voltage	250 Vac
Rated current, section 0,50 mm2	3A
Frequency	50 / 60 Hz
Degree of protection IP	N.A. (to test with the opposite part)
Temperature range	-30°C / +90°C
Connectable conductors	Flexible cables

TEST

Glow wire test	550°C (EN 60335-1)
----------------	--------------------

CABLES

Type	H03V2V2-F
Section	0,50 mm2

MATERIAL MOULDING

Insulation	PVC TM3 / UL 758 105°C—96 Sh A
------------	--------------------------------

CATEGORY

Connectors for pumps and circulators

CERTIFICATION

